

## T5 Standard Short

F6W/T5/33-640  
0000013



### Product features



## PRODUCT OVERVIEW

Product name	F6W/T5/33-640
Technology	Fluorescent
Watt (Rated) (W)	5.80
Lamp shape	Tubular shape
Type	T5 Standard Short
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4942321
E-number SE	8356708
E-number Norway	3822407
Luminous flux (lm)	280
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	48
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	64
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	6.00
Product Voltage (V)	42
Dimmable	Yes
Average life (Nominal) (h)	10000
Product EAN number	5410288000138

## DATA TABLE

### General data

Product name	F6W/T5/33-640
Technology	Fluorescent
Watt (Rated) (W)	5.80
Lamp shape	Tubular shape
Type	T5 Standard Short
Cap/Base	G5

## T5 Standard Short

F6W/T5/33-640

0000013

Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4942321
E-number SE	8356708
E-number Norway	3822407

### Optical data

Luminous flux (lm)	280
Luminous flux (Rated) (lm)	280
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	48
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	640
CRI (Ra)	64
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.88
Rated lumen maint. factor (%) at 4000 h 50Hz	0.82
Rated lumen maint. factor (%) at 6000 h 50Hz	0.78
Rated lumen maint. factor (%) at 8000 h 50Hz	0.75

### Electrical data

Wattage (W)	6.00
Watt (Rated) - High frequency (W)	6
Current (A)	0.160
Mains voltage (V)	220-240V~
Product Voltage (V)	42
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	160
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	7

### Lifetime data

Average life (Nominal) (h)	10000
Average life (Rated) (h)	10000
Rated survival factor (%) at 2000 h 50Hz	1.00
Rated survival factor (%) at 4000 h 50Hz	0.99
Rated survival factor (%) at 6000 h 50Hz	0.96

## T5 Standard Short

F6W/T5/33-640  
0000013

Rated survival factor (%) at 8000 h 50Hz 0.83

### Physical data

Nominal Product Length (mm)	225.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	212.1
Length base to pin Min-Max (mm) - B	216.8-219.2
Max. Lamp Length (mm) - C/L	226.3
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.022


### Packaging

Single packaging type	Carton
Product EAN number	5410288000138
Packaging single length / height (cm)	22.7
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (inner)	25410288000132
DUN14 (outer)	15410288000135
Units per outer package	25
Packaging outer length / height (cm)	24.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	10.0


### Safety data

Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

## PHOTOMETRY

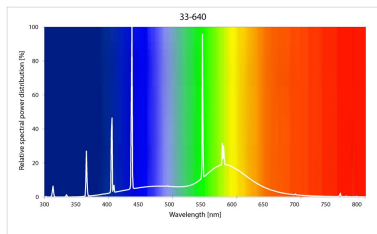


## TECHNICAL DRAWINGS



# SYLVANIA

T5 Standard Short  
F6W/T5/33-640  
0000013

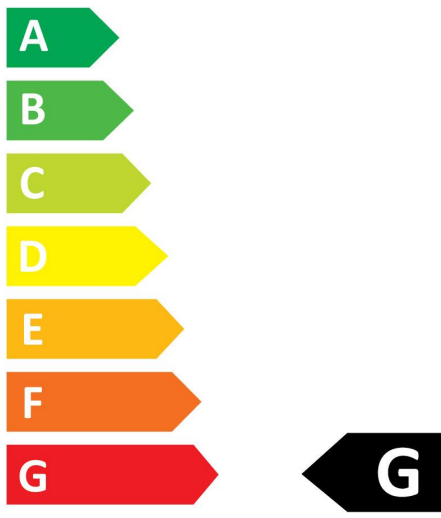

**6**  
kWh/1000h



2019/2015


T5 Standard Short

F6W/T5/33-640

0000013



0000013

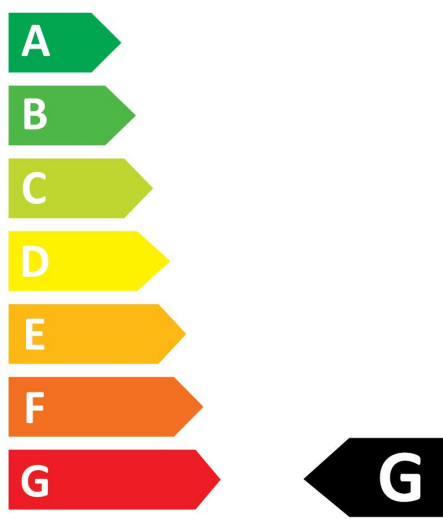

**6**  
kWh/1000h



2019/2015