

Radium

Ralotherm

Powerful
short-wave
halogen heat lamps




Applications

- Processing of plastic and thermoforming
- Paper and printing industry
- Paint drying
- Coil coating
- Semi-conductor industry
- Outdoor and indoor zone-heating
- Catering (heated counter tops)
- Infrared cabins

Advantages

- Fast heating action with highest efficiency
- High operating safety and reliability
- Optimum adjustment and controllability
- Long average lifetime of the lamp
- Instant full output
- Space-saving, maintenance-friendly installation
- Low operating costs
- Lamps with reflector coating for directional heat

www.radium.de/en/ralotherm

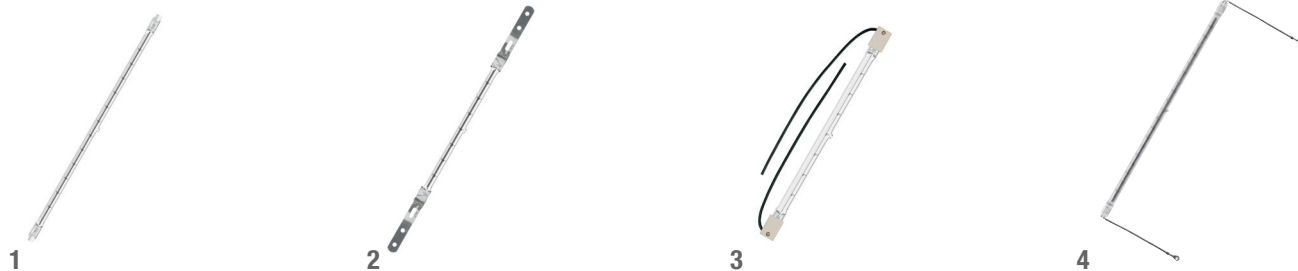

Ralotherm 0170 R7s

			W	A	I mm	I_{RAD} mm	ø d mm		B50	V		
1	24317329	ITT 200/235-0170	200	0.9	185.7	125.0	9.6	p15	5 000	235	R7s	12
1	24315704	ITT 300/235-0170K	300	1.3	114.2	67.0	9.6	s180	5 000	235	R7s	20
1	24317330	ITT 350/235-0170	350	1.5	185.7	125.0	9.6	p15	5 000	235	R7s	12
1	24317331	ITT 500/235-0170	500	2.1	250.7	168.0	9.6	p15	5 000	235	R7s	12
1	24317338	ITT 500/235-0170 K	500	2.1	214.0	161.0	9.6	s180	5 000	235	R7s	12
1	24317340	ITT 500/235-0870	500	2.1	250.7	168.0	9.6	s180	5 000	235	R7s	12
1	24317332	ITT 700/235-0170	700	3.0	250.7	176.0	9.6	p15	5 000	235	R7s	12
1	24317333	ITT 1000/235-0170	1 000	4.3	327.4	270.0	9.6	p15	5 000	235	R7s	12

Ralotherm Metal Lug

2	24317326	ITT 500/235-08X0	500	2.1	238.0	161.0	9.6	s180	5 000	235	Metal Lug	12
2	24317327	ITT 1000/235-08X0	1 000	4.3	365.0	270.0	9.6	p15	5 000	235	Metal Lug	12
2	24317324	ITT 1000/235-01X0	1 000	4.3	365.7	271.0	9.6	p15	5 000	235	Metal Lug	12
2	24317559	ITT 2000/400-01X0 S	2 000	5.0	508.0	430.0	9.6	p15	5 000	400	Metal Lug	12
2	24317560	ITT 3000/400-01X0 S	3 000	7.5	798.0	706.0	9.6	p15	5 000	400	Metal Lug	12

Ralotherm Cable

3	24317348	ITT 1000/235-0826 S	1 000	4.3	351.0	271.0	9.6	s180	5 000	235	Cable	12
3	24317343	ITT 2000/235-0826 K/S	2 000	8.5	351.0	283.0	9.6	s180	5 000	235	Cable	12
4	24317325	ITT 2200/235-0102	2 200	9.3	345.0	293.0	11.3	s180	5 000	235	Cable	12
3	24314378	ITP 2500/235V-0826 K/S	2 500	10.6	351.0	284.0	9.6	s180	3 000	235	Cable	12
3	24317403	ITT 2500/235-0826 K/S	2 500	10.6	351.0	284.0	10.6	p15	5 000	235	Cable	12
3	24317342	ITT 2500/400-0826 K	2 500	6.3	351.0	284.0	9.6	p15	4 000	400	Cable	12
3	24317566	ITT 2500/400-0828 M	2 500	6.3	380.0	310.0	9.6	p15	5 000	400	Cable	12
3	24317341	ITT 3000/400-0826 K	3 000	7.5	351.0	284.0	10.6	p15	5 000	400	Cable	12
3	24317567	ITT 3000/400-0828 M	3 000	7.5	380.0	310.0	9.6	p15	5 000	400	Cable	12

Customer specific solutions on demand